




1235. Sok. (Eski 58. Sok) No:123/125 06370 **OSB Ostim / ANKARA / TÜRKİYE**

t: +90 312 354 00 61 • **+90 312 354 02 68** **f:** +90 312 385 77 59

✉ info@saygilimakina.com.tr **🌐 www.saygilimakina.com.tr**

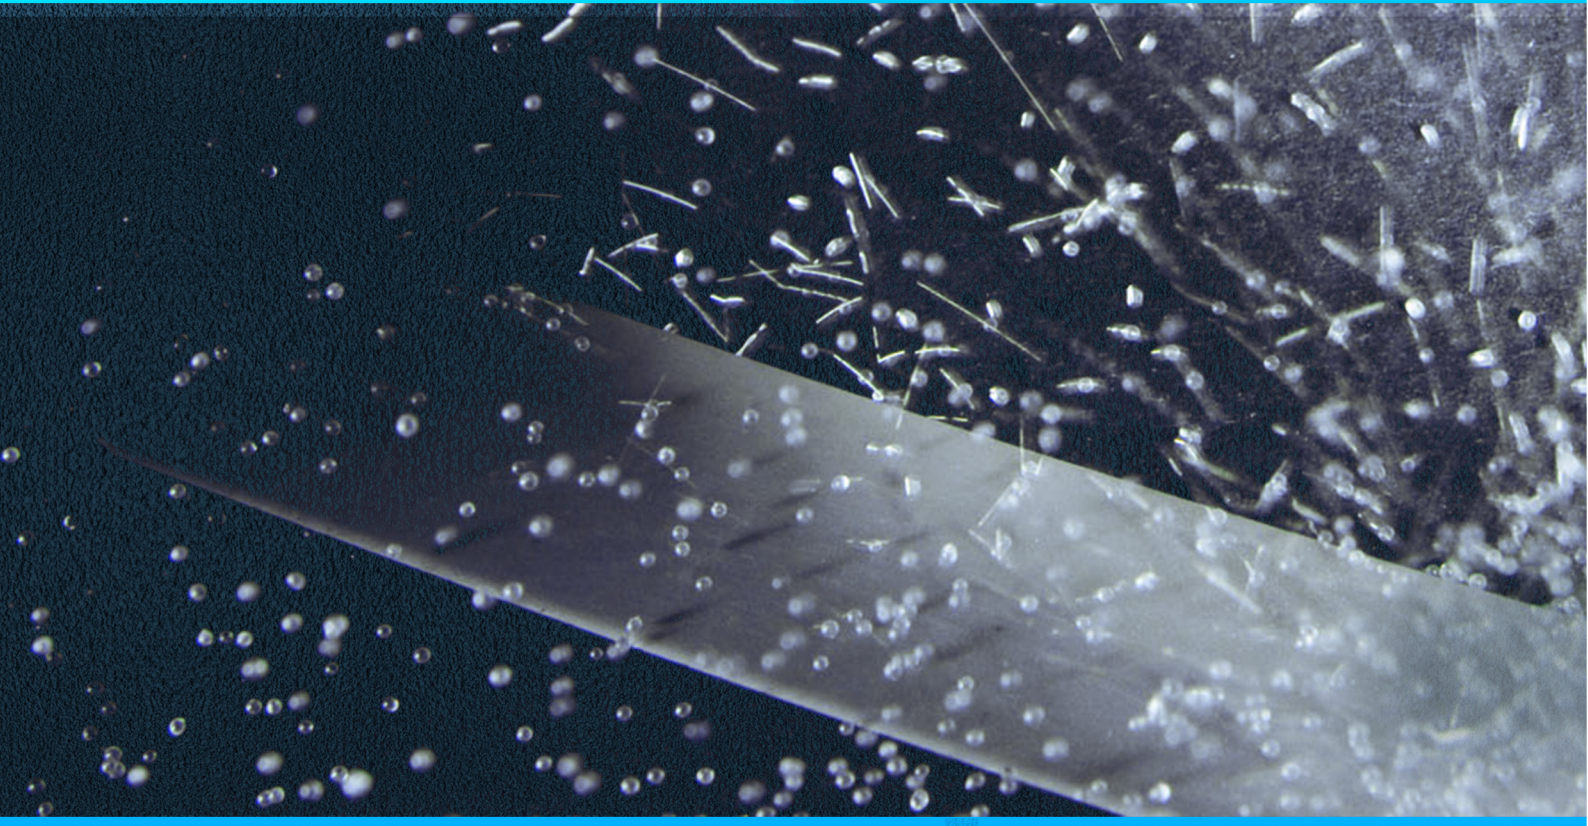

TÜNEL TİP, SAC VE PROFİL KUMLAMA MAKİNESİ
TUNNEL TYPE, SHEET AND PROFILE SHOTBLASTING MACHINE



TÜNEL TİP, SAC VE PROFİL KUMLAMA MAKİNESİ

TUNNEL TYPE, SHEET AND PROFILE SHOTBLASTING MACHINE



TÜNEL TİP, SAC VE PROFİL KUMLAMA MAKİNESİ

Makine gövdesi giriş ve çıkış ruloları, filtre ünitesi, türbinler, elevatör, seperatör, siklon ve kumanda panosundan oluşmaktadır. Makine iç kısmı aşınmaya dayanıklı manganlı çelik plakalar ile kaplıdır. Makinenin giriş ve çıkışında bulunan malzemelerin istenilen hızda ilerlemesi hız kontrol sistemi sayesinde ayarlanabilir. Hız ayarı hız kontrol ünitesi ile yapılır. Makine gövdesinin alt ve üst kısmına yerleştirilen türbinler, alttan ve üstten bombardıman yaparak, malzemenin çevrilmeden bir defada her tarafının temizlenmesini sağlar.

Filtre otomatik patlatmalı kuru sistem olup, içerisindeki bez torbalar sayesinde tozun dışarı çıkmasını engeller. Torbalardaki tozun temizlenmesi otomatik patlaç valfler ile yapılır.

TUNNEL TYPE, SHEET AND PROFILE SHOTBLASTING MACHINE

This machine consists of a cabin, elevator, seperator, filter, turbines, cyclone and control panel.

In the cabin; turbine target sides are manganesed steel. The materials' speed - placed at the input and output of the machine- could be arranged by a speed control system. The turbines placed at the bottom and top of the machine, cleans all part of the materials at once by bombing up and down and without turning.

The filter is a dry system and with its bags inside, it prevents the dust to go out. The dust in bags are cleaned by automated pulse valves.

MAKİNE TİPİ	Birim	TSP-1	TSP-2	TSP-3	TSP-4	TSP-5	TSP-6
Gabari Yüksekliği	mm	500	500	1000	1500	1000	550
Gabari Eni	mm	1500	2000	2000	2000	2500	3000
Türbin Sayısı	adet	6	6	6	8	8	8
Türbin Çapı – Palet Sayısı	ø - adet	380 – 8	380 – 8	380 – 8	380 – 8	380 – 8	380 – 8
Türbin Motoru	kw	11	11	11	11	11	15
Türbin Granül Debisi	kg/dk	140	140	140	140	140	250
Filtre Kapasitesi	m ²	90	120	150	150	2 x 90	2 x 120
Fan Hava Debisi	m ³ /h	8000	11500	14000	14000	2 x 8000	2 x 11500
Makine Uzunluğu	mm	22000	32000	32000	32000	32800	33000
Makine Genişliği	mm	6500	7000	7200	7500	8000	9200
Makine Yüksekliği	mm	6400	6500	6500	6600	6500	6750

MAKİNE TİPİ	Unit	TSP-1	TSP-2	TSP-3	TSP-4	TSP-5	TSP-6
Max. Workpiece Height	mm	500	500	1000	1500	1000	550
Max Workpiece Width	mm	1500	2000	2000	2000	2500	3000
Number of Turbines	adet	6	6	6	8	8	8
Turbine Diameter & Number	ø - adet	380 – 8	380 – 8	380 – 8	380 – 8	380 – 8	380 – 8
Turbine Engine	kw	11	11	11	11	11	15
Granule Flow	kg/dk	140	140	140	140	140	250
Filter Capacity	m ²	90	120	150	150	2 x 90	2 x 120
Airflow Rate	m ³ /h	8000	11500	14000	14000	2 x 8000	2 x 11500
Machine Length	mm	22000	32000	32000	32000	32800	33000
Machine Width	mm	6500	7000	7200	7500	8000	9200
Machine Height	mm	6400	6500	6500	6600	6500	6750

